


LINA 300


SKU: NZ-0015



Description:

- Direct lighting highbay luminaire for use with LEDs.
- Corrosion resistant die-cast aluminium body.
- Installation with bracket on ceiling surfaces.
- Mains voltage: 220-240V / 50-60Hz.
- Clever thermal design.
- Suitable for illumination up to 6-10 meter height.
- Optionally 2 cable entries for through-wiring of mains supply cable.
- All external screws are stainless steel.
- Double layer polyester powder paint resistant to corrosion and salt spray fog.
- High colour consistency: <3 SDCM
- Stainless steel cable gland and mains cable provided with IP68 socket.
- Mechanical aiming lock.
- 1-10V and DALI control options available.
- Angle beam : 17, 50, 97 , Oval 33x110 dg available

Technical Informations:

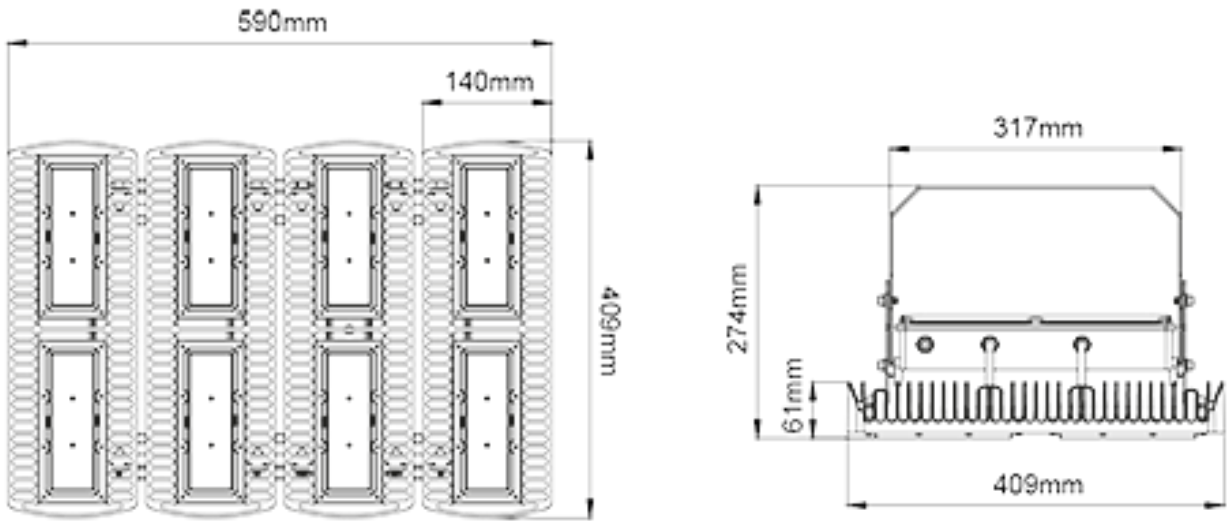

Model	Power	CRI	Kelvin	Lumen
LINA 300	300w	CRI 70	2700K	29192
			3000K	29660
			3500K	31024
			4000K	31704
			5000K	32048
			6500K	32388
LINA 300	300w	CRI 80	2700K	29036
			3000K	29372
			3500K	30720
			4000K	31392
			5000K	31732
			6500K	32072
	200w		available	