


LINA 300 S


SKU: NZ-0016



Description:

- Direct lighting highbay luminaire for use with LEDs.
- Corrosion resistant die-cast aluminium body.
- Installation with bracket on ceiling surfaces.
- Mains voltage: 220-240V / 50-60Hz.
- Clever thermal design.
- Suitable for illumination up to 6-10 meter height.
- Optionally 2 cable entries for through-wiring of mains supply cable.
- All external screws are stainless steel.
- Double layer polyester powder paint resistant to corrosion and salt spray fog.
- High colour consistency: <3 SDCM
- Stainless steel cable gland and mains cable provided with IP68 socket.
- Mechanical aiming lock.
- 1-10V and DALI control options available.
- Angle beam : 17, 50, 97 , Oval 33x110 dg available

Technical Informations:

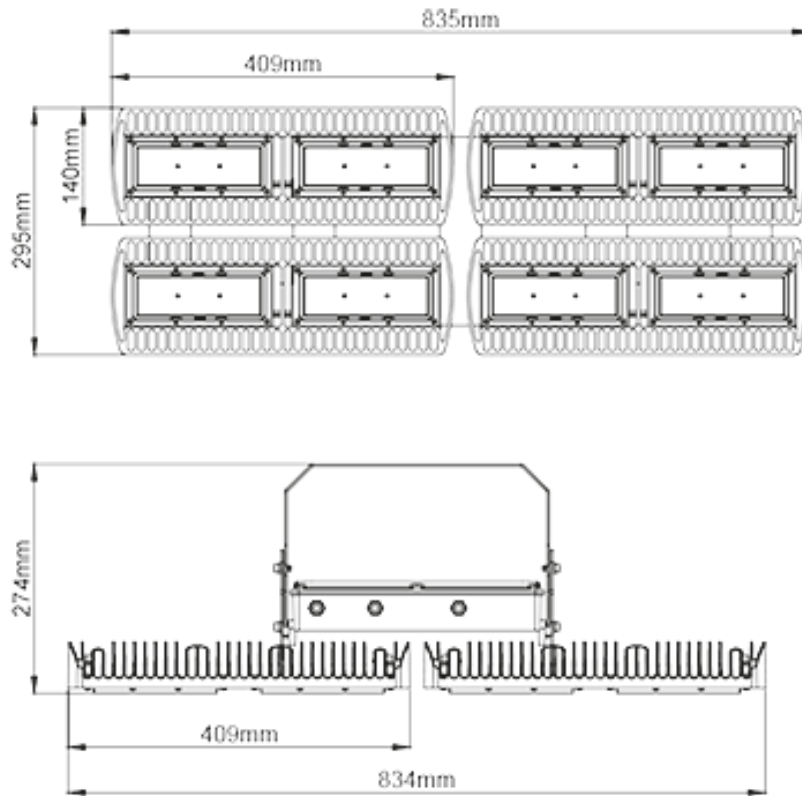

Model	Power	CRI	Kelvin	Lumen
LINA 300 S	300w	CRI 70	2700K	29192
			3000K	29660
			3500K	31024
			4000K	31704
			5000K	32048
			6500K	32388
LINA 300 S	300w	CRI 80	2700K	29036
			3000K	29372
			3500K	30720
			4000K	31392
			5000K	31732
			6500K	32072
	200w		available	