

URSA R

SKU: NZ-0033





Description:

Die-cast aluminium body.

Mains voltage: 220-240V / 50-60Hz.

Clever thermal design with passive heat dissipation.

Clear safety glass.

Classic dimming systems of DALI, 1-10V and Phase-Cut Dim options.

High tech control systems of Tuneable White, Warm Dim and Wireless Dim options.


High tech control systems of Warm Dim and Wireless Dim options.

Basic colours: White, Black, Gray and special color options.

20, 35, 50, 70, 20x60 Oval beam angle options

Standart CRI>80, high CRI>90 and super high CRI>98 LED options available.

Technical Informations:

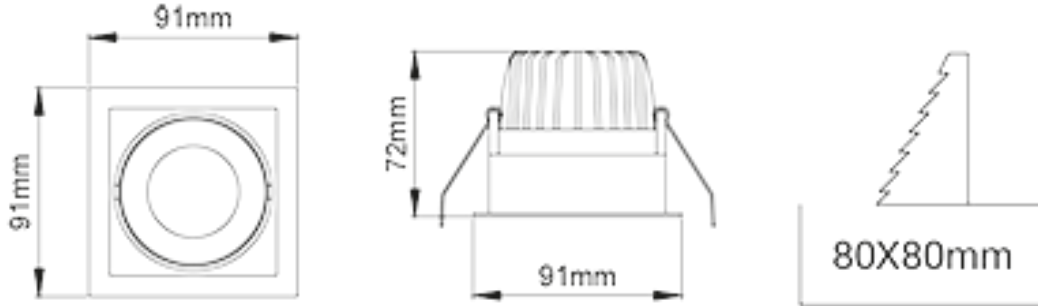

Model	Power	CRI	Kelvin	Lumen
URSA R	15w	CRI 80	2700K	1651
			3000K	1702
			3500K	1762
			4000K	1821
			5000K	1948